


PPC91xx

Vehicle Computer, product line


- Intel ATOM 1.6 GHz
- Ethernet, 4 × USB 2.0
- Wide range of communication options
- Wireless communication
- OS Linux / WXPe

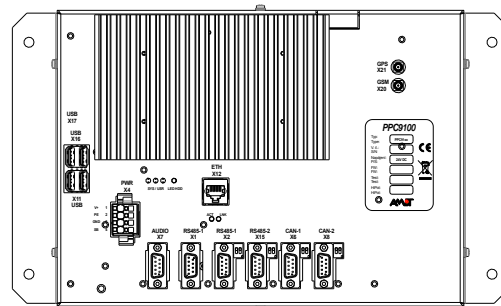


TECHNICAL DATA

Processor	Intel ATOM 1.6 GHz
Memory	RAM 1 GB, Flash 4 GB
Internal drive	Optionally None / SSD 1 GB to 16 GB
Operation system	Optionally None / Linux / WXPe
Peripherals	4 × USB 2.0
Video output	1 × DVI-D
Audio	Optionally stereo output
Ethernet interface	Optionally 1 × Ethernet 10/100/1000 Mbps / RJ45 or optionally 1 × Ethernet 10/100 Mbps / M12
RS232	Optionally 0 × / 1 × Without galvanic separation
RS485	Optionally 0 × / 1 × / 2 × With galvanic separation
CAN	Optionally 0 × / 1 × / 2 × With galvanic separation
MVB	Optionally 0 × / 1 ×
Wireless communication	Optionally WiFi Optionally GPS + GPRS
Power supply	Optionally 24 V DC / 48 V DC / 72 V DC / 110 V DC
Other technical information	
Protection front panel / back panel	IP65 / IP20
Operating temperature	-40 °C to 70 °C
Storage temperature	-40 °C to 70 °C
Max. ambient humidity	< 95 % non-condensing
Mounting	On the base plate
Weight	Typ. 4 kg
Dimensions (w × h × d)	(343 × 210 × 116) mm

CONNECTORS LOCATION

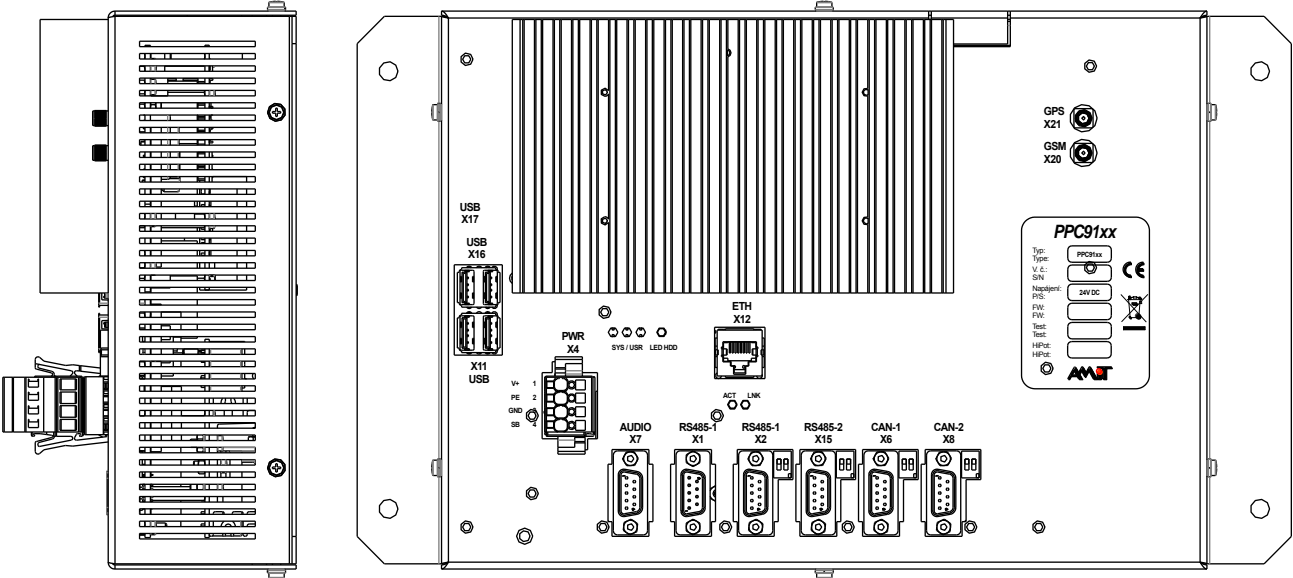

COMPUTER DIMENSIONS

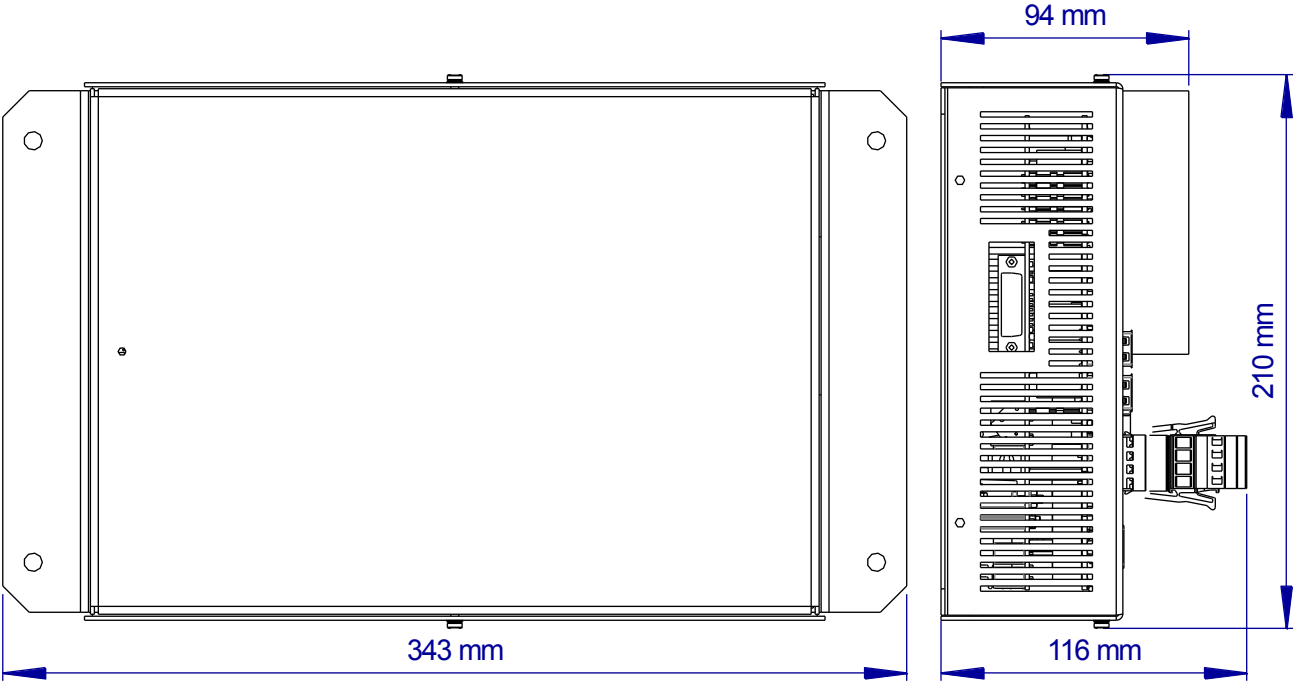

PPC91xx

Vehicle Computer, product line

We offer the right version according to your requirements. Please send the inquiry form.

INQUIRY FORM

Operation system		MVB *)	
	None		No
	Linux		Class 1 (DS + PD)
	Windows XP Embedded		Class 2 (DS + PD + MD)
Internal drive			Class 4 without MD (DS + PD + BA)
	No		Class 4 (DS + PD + MD + BA)
	1 GB	WiFi	
	2 GB		No
	8 GB		1 ×
	16 GB	GPS + GPRS	
RS232			No
	No		1 ×
	1 ×	Audio	
RS485			No
	No		Stereo audio output
	1 ×	Ethernet interface	
	2 ×		RJ45 connector
CAN			M12 connector
	No	Power supply	
	1 ×		24 V DC
	2 ×		48 V DC
			72 V DC
			110 V DC

*) DS – device status, PD – process data, MD – message data, BA – bus administrator