

1080p Full HD True Day / Night Mobile IR Mini Dome Camera








Features

- 1080p Full HD with high flexibility and performance for astounding image
- Adopts Sony Starvis CMOS sensor, delivering amazing high sensitivity
- Astounding image quality from the 2.8mm lens
- Extended IR range up to 10m / 33ft. with 6 LEDs (depends on scene IR reflectivity)
- True-WDR to improve the visibility under high contrast scene
- 3D-Noise Reduction ensures less blurry moving subjects, vivid and high SN ratio images even under low light environments
- Flexible angle viewing with 3-Axis rotation design allows wall or ceiling mounting
- Supports UTC function: Control camera OSD settings directly from DVR end

Dimensions

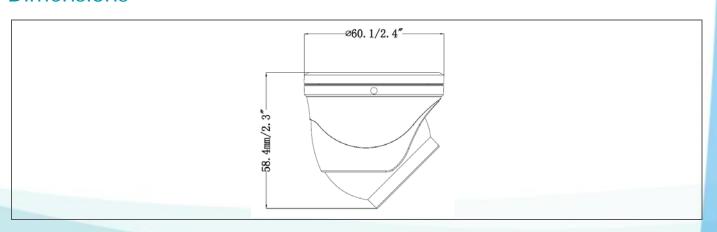

^{*}All images presented in this document are for example only. Product models may vary in different countries. Please visit EverFocus regional Websites for detailed ordering information.

^{*}Information contained in this document is subject to change without notice.

Specifications

Model No.	EMD990F		
Pickup Device	1080p Sony Starvis CMOS sensor	S/N Ratio	>50dB (AGC off)
Video Format	NTSC / PAL	OSD Languages	English / Simplified Chinese / Traditional Chinese / German / French / Italian / Spanish / Polish / Russian / Portuguese / Netherlands / Turkish / Korean / Japanese / Hebrew / Arabic
Effective Pixels	1920 (H) x 1080 (V)	DNR	2DNR / 3DNR, Off
Scanning System	Progressive Scan	Defog	Off / Auto
Sensitivity	0 Lux with IR On	T-WDR	On / Off / Auto (120dB)
Electronic Shutter	Auto / Manual (x30 ~ 1/50,000)	Sens-up	Off / Auto (x2 ~ x30)
Gamma Correction	0.45 ~ 100	Mirror	Off / Mirror / V-Flip / Rotate
Lens Type	2.8mm fixed lens	Motion Detection	Off / On for 4 selectable zones
FOV	H=120°, V=80°, D=140°	Privacy Mask	Off / On for 4 selectable zones
BLC	OFF / BLC / HSBLC / WDR Selectable	Environmental	IP68 Weather Resistant
AGC	0 ~ 15 Levels	Power Source	12VDC
White Balance	ATW / AWC-SET / Indoor / Outdoor / Manual / AWB	Power Consumption	2W max.
Sync. Mode	Internal	Operating	-20°C ~ 50°C / -4°F ~ 122°F
Day / Night	Ext, Auto, Color, B/W	Humidity	Less than 80%
UTC Function	Supported	Dimensions (H x D)	58.4 x 60.1mm / 2.3" x 2.4"
IR LEDs	6 Units	Weight	160g / 0.35lb
IR Distance	Up to 10m / 33ft. (depends on scene IR reflectivity)	Certificates	CE, FCC, RoHS

