

# Device Networking Access



RoHS

**AW5500**

802.11a/b/g/n

: -10 ~ 60°C

Web- /

(Device View)

Device View Web-  
5

2.4

AW5500


, AW5500

( WDS Bridge AP- )

AW5500 -

FCC ( ), ETSI ( ) NCC

( )

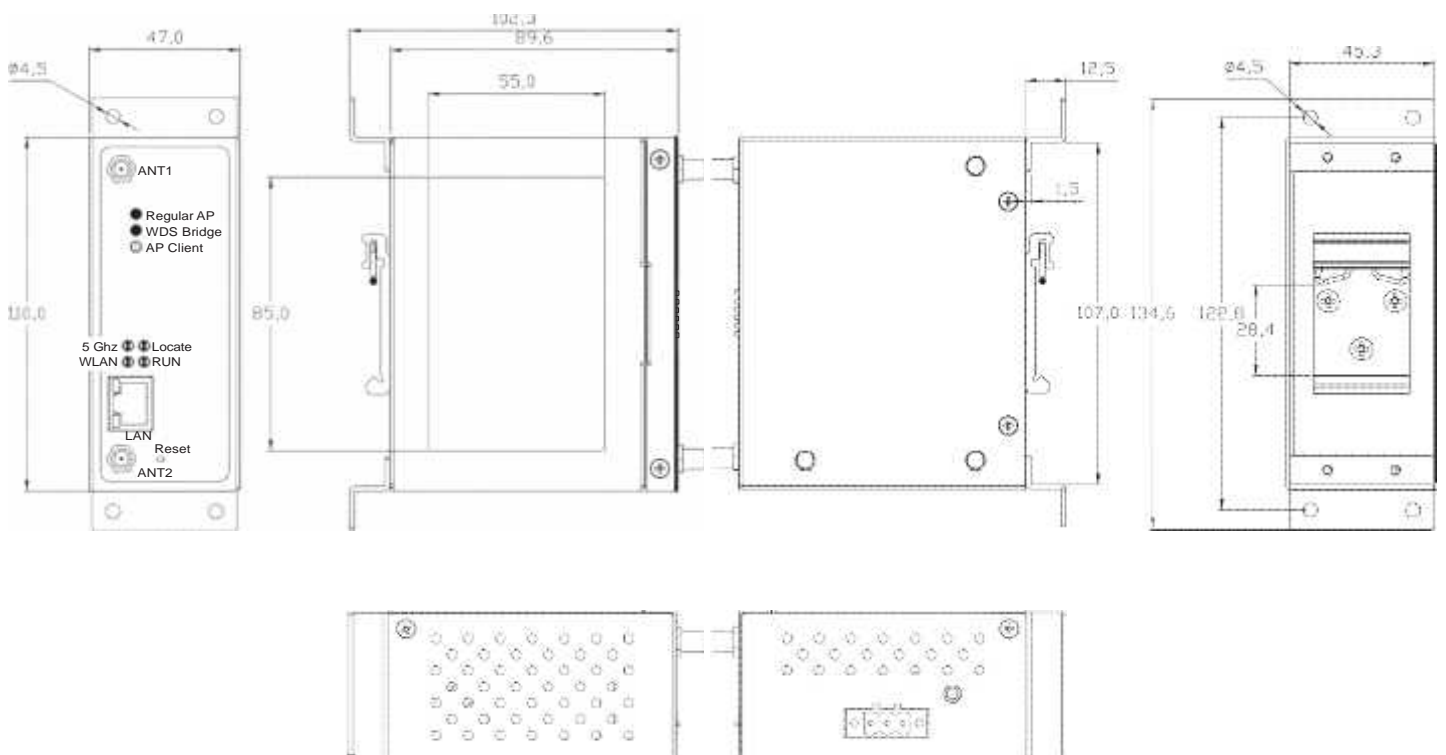



# AW5500

		+9-48	AP, WDS, AP-	
(9 )	0.65 A	WEP, WPA, WPA2, TKIP, AES, 802.1x		
		. 5.85 ( )	, Firewall /	
		3-	E-mail / SNMP-	
		47*110*90	ICMP, TCP, UDP, DHCP	
		DIN,	DNS, SNMP, NTP, SMTP, HTTP, IPv4,	
		( )	802.1x, RADIUS, STP/RSTP	
<b>Reset</b>			<b>5</b>	
		-10°C ~ 60°C (14°F ~ 140°F)	<b>AW5500</b> (P/N):1P1AW550000001G	
		-40°C ~ 85°C (-40°F ~ 185°F)		
		5 ~ 95% ( )		
			<b>AD17-24C ( -Y)</b>	
			: 50500151240002G	
			Y, ~100-240 ,	
			0.6 A, 24 ,	
			<b>AD17-24D ( -Y)</b>	
			: 50500151240012G	
			Y, ~100-240 ,	
			0.6 A, 24 ,	
<b>Ethernet</b>	EEE802.3ab 1000 Base-T			
<b>PCI-</b>	Atheros AR9382			
<b>/</b>	2T2R MIMO (2x2 MCS 0-15)			
	802.11a, 802.11b, 802.11g, and 802.11n			
	3/5 , SMA(R),			
		EN55022, EN55024		
		EN 301489-1/17 (Class A), FCC 15 Subpart B (Class A), CNS 13438		
		FCC 15 Subpart C, FCC 15 Subpart E, EN 301893, EN 300328, NCC LP00002		
<b>EN61000-4-2</b>	ESD		±8	4
			±15	4
<b>EN61000-4-3</b>	RS	( )	10 ( / )	3
<b>EN61000-4-4</b>	EFT		±2.0	3
		LAN	±2.0	4
<b>EN61000-4-5</b>	Surge		- ±1.0	3
			- ±2.0	3
		LAN	- ±2.0	3
<b>EN61000-4-6</b>	CS	( )	10	3
<b>EN61000-4-8</b>	PFMF	( )	10 ( / )	3
		UL60950-1/CB, EN60950-1, CNS 14336 IEC 60068-2-27		
		IEC 60068-2-32		
		IEC 60068-2-6		
		( )		
<b>RoHS</b>				

" " -  
**ATOP**  
 ,  
 , .71,  
 . 313  
 8 800 555-75-76  
[www.euromobile.ru](http://www.euromobile.ru)  
[info@euroml.ru](mailto:info@euroml.ru)

ООО "ЕвроМобайл Украина"  
 Запорожье, ул. 40 лет советской украины,  
 13, а/с 3980, Запори́жжя, Украина, 69000  
 +380 612 134 177  
[www.euromobile.com.ua](http://www.euromobile.com.ua)

