


FR8WPxx

Loudspeaker for Rolling Stock

- Full-range loudspeaker
- Outdoor design
- Panel mounting
- Black colour

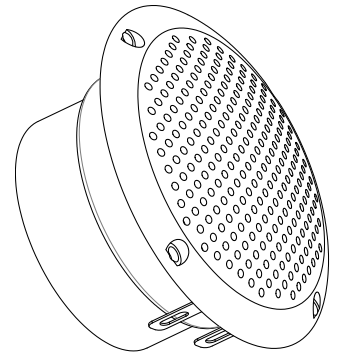

TECHNICAL DATA

Electrical parameters		
Impedance		8 Ω or 4 Ω *)
Rated power		15 W
Maximum power		25 W
Frequency response		100 Hz to 20000 Hz
Resonance frequency		158 Hz
Signal connection		
Connection	terminal + terminal -	Faston (5,2 × 0,5) mm Faston (2,8 × 0,5) mm
Others		
Colour		Black or White *)
Front protection rate		IP65 **)
Operating temperature		-40 °C to 80 °C
Storage temperature		-40 °C to 80 °C
Max. ambient humidity		< 95 % non-condensing
Mounting		Wall mounted, hole Ø75 mm, 4 × M3 screws
Weight		220 g
Dimensions (d × v)		(90 × 49) mm

*) See ordering information


***) With FR8WP TES

ORDERING INFORMATION

FR8WP4OHM/B	Loudspeaker 4 ohm, black colour
FR8WP4OHM/W	Loudspeaker 4 ohm, white colour
FR8WP8OHM/B	Loudspeaker 8 ohm, black colour
FR8WP8OHM/W	Loudspeaker 8 ohm, white colour
FR8WP TES	Seal for RR8WP

PHYSICAL DIMENSIONS

LOUDSPEAKER

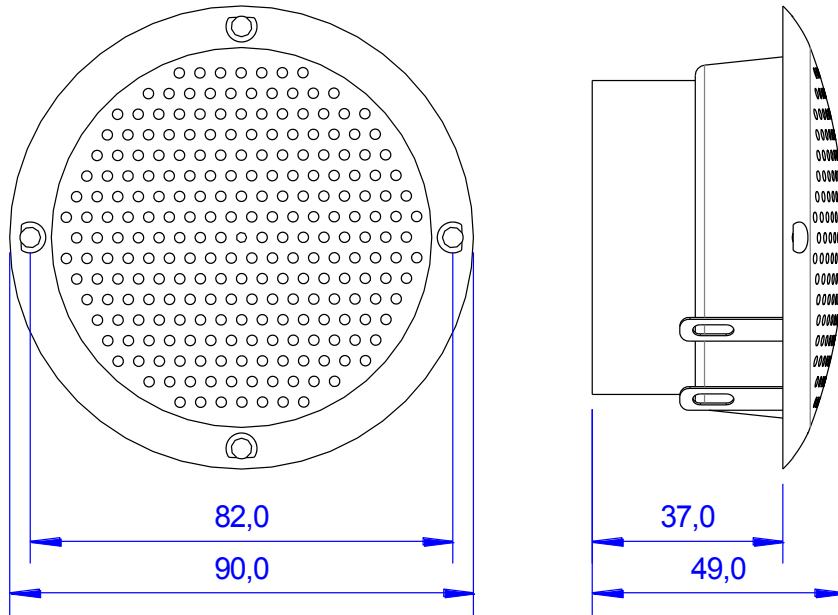

SEAL

