

## ■ Features :


- Universal AC input 88 - 264Vac
- Installed on DIN rail TS35 / 7.5 or 15
- Brown-out protection
- Protections: Short circuit / Over load / Over voltage
- All using 105°C long life electrolytic capacitors
- High operation temperature up to 70°C
- True DC OK signal output
- Withstand 2G vibration test
- High efficiency, long life and high reliability
- 3 years warranty
- UL508 ( Industrial control equipment ) listed
- UL1310 Class 2 Power unit / LPS pass



	MODEL	DN-10-12	DN-10-15	DN-10-24		
Output	DC Voltage Range	12V	15V	24V		
	Rated Current	0.84A	0.67A	0.42A		
	Current Range	0 ~ 0.84A	0 ~ 0.67A	0 ~ 0.42A		
	Rated Power	10.08W	10.05W	10.08W		
	Ripple & Noise (max.) Note.2	100 mVp-p	100 mVp-p	120 mVp-p		
	Voltage Adj. Range	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V		
	Voltage Tolerance Note.3	±1%	±1%	±1%		
	Line Regulation	±1%	±1%	±1%		
	Load Regulation	±1%	±1%	±1%		
	Setup, Rise Time	<800ms, <100ms/230Vac at full load				
Input	Hold Up Time (Typ.)	>32ms / 230VAC	>16ms / 115VAC at full load			
	Voltage Range Note.4	88V ~ 264VAC	124 ~ 370VDC			
	Frequency Range	47Hz ~ 63Hz				
	Efficiency (Typ.)	81%	81%	81%		
	AC Current (Typ.)	0.23 A / 115VAC	0.17A / 230VAC			
	Inrush Current (Typ.)	15A / 115VAC	30A / 230VAC			
Protection	Leakage Current	<1mA / 230VAC				
	Over Load	>102 % rated output power	Protection type : constant current limiting, automatically after fault condition is removed			
	Over Voltage	115% ~ 150% rated output voltage	Protection type : latch-off mode			
Environment	Working Temp.	>20°C ~ 70°C (Refer to output load de-rating curve)				
	Working Humidity	20 ~ 90% RH non-condensing				
	Storage Temp., Humidity	-40 ~ +85°C, 10 ~ 95% R.H				
	Temp.Coefficient	±0.03%/°C (0 ~ 50°C)				
	Vibration	10 ~ 500Hz, 2G 10min./1 cycle, period for 60 min. Each along X,Y,Z axes				
Safety & EMC Note.5	Safety Standards	UL508, TUV EN60950-1 : 2006+A11, UL1310 NEC class 2 compliant				
	Withstand Voltage	I/P - O/P:3KVAC (4242 DC) I/P - FG:1.5KVAC (2121 DC) 1 minute				
	Isolation Resistance	I/P - O/P, I/P - FG, O/P - FG: 100M Ohms / 500VDC				
	EMI Conduction & Radiation	EN55022 : 2006+A1:2007 Class B				
	Harmonic Current	EN61000-3-2:2006 Class A, EN61000-3-3:2008				
Others	EMS Immunity	EN61204-3: 2000, EN55024: 1998+A1: 2001+A2: 2003 light industry level, criteria A				
	DC OK signal	Open collector. Max : 40mA				
	Connection	I/P 3 poles, O/P : 3 poles screw DIN terminal				
	MTBF (MIL-HDBK-217F)	562.7K HRS				
	Cooling	Free Air convection				
	Dimension (W*H*D)(mm)	23x90x99				
Note	Packing	0.13kg ; 48Pcs / 7.44kg				
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47 uf parallel capacitor. 3. Tolerance: includes set up tolerance, line regulation and load regulation. 4. De-rating may be needed under low input voltages. Please check the de-rating curve for more details. 5. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives					

## Mechanical Specification


Unit : mm

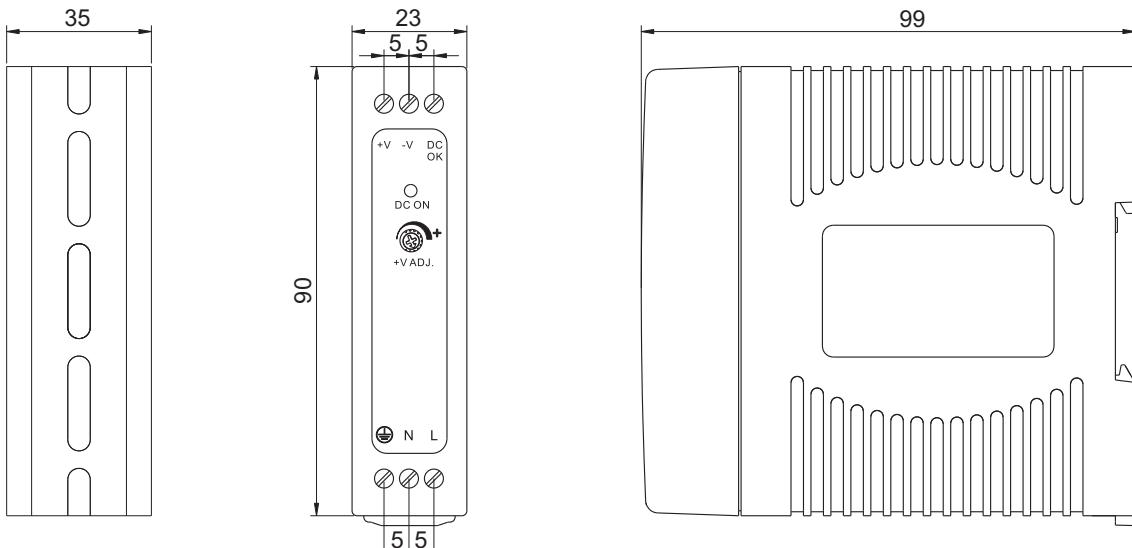

install DIN rail TS35 / 7.5 or TS35 / 15


## Application of DC OK Active Signal

(a) 5V signal




Model	R
12V	$\geq 1.5\text{K}\Omega$
15V	$\geq 2\text{K}\Omega$
24V	$\geq 3.9\text{K}\Omega$

(b) LED




Model	R
12V	$\geq 2.4\text{K}\Omega$
15V	$\geq 3\text{K}\Omega$
24V	$\geq 4.7\text{K}\Omega$

(c) Relay

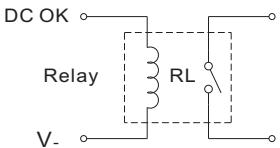


Model	R
12V	$\geq 700\Omega$
15V	$\geq 700\Omega$
24V	$\geq 1.2\text{K}\Omega$

## Block Diagram

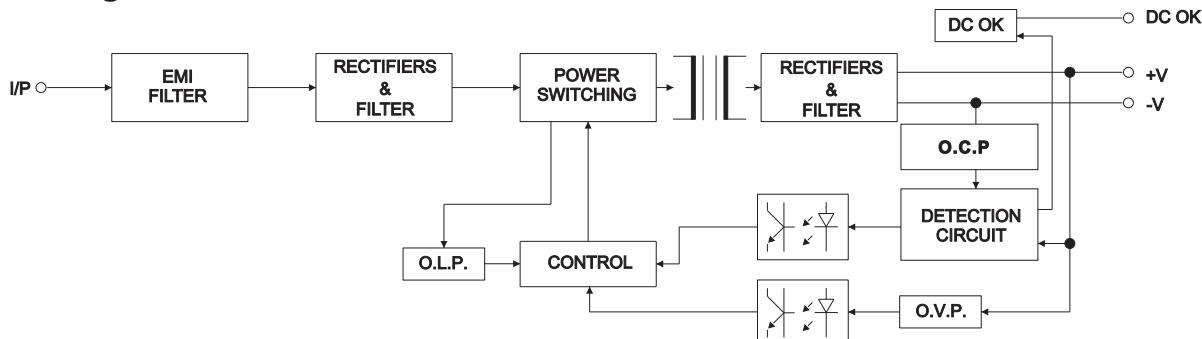

## De-rating Curve

Load V.S Temp.

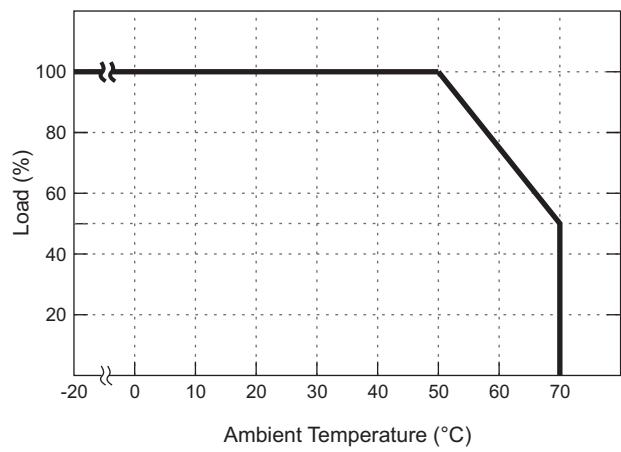

Load V.S I/P Voltage

