

7 inch Car LCD Monitor

User manual



Before the installation and use, be sure to read the Manual, so you can properly use and protect your machine. The statement in front of the matters to the attention of the installation and use, please read first.

➤ **Attention**

- To protect your rights ,before using and installing this product, please carefully read the contents of the manual.
- This product is use for car inside, in order to prevent short-circuit or the risk of electric shock, do not be the machine on the rain or humidity environment.
- Don't try to repair the machine, immediately disconnect the power of screen if find whatever questions and contact with us or the dealer.
- Don't use the thinner or the other chemistry cleanser to wipe the product, please use the tender cloth to clean the dust and dirt of the product.
- Please let the product keep away from somewhere too hot or too cold. The range of operation temperature is 0°C~40°C, and -20°C~60°C for save temperature.
- This product is high-tech equipment, machines can not be repair by user even very small original part. Once failure occurrence, machine must be repaired by qualified technical personnel, or contact with the dealer.

➤ **Packing list**

Product name	Count(pc)
LCD display monitor (with fixed rack)	1
Remote control	1
Connecting line	1
User manual	1
Certificate of Quality	1

➤ **Kindly remember**

- We advise you to let the professional technical personnel to install the product on your car or somewhere you need.
- Please check the connecting is normal and the fuze whether fuse at first when you find the machine cant work normally.
- When the lapse rate toboggan, there may appear dew in the screen, you should turn on machine and wait for a few seconds till the dew ablate by itself then renew to working.

-
- If the temperature is too high or too low, the screen display may not be clear, it is not a quality problem. You should wait for the temperature to return to normal, the screen can work normally.

Note: This product specification or parameters change without notice.

CONTENTS

1, MONITOR & KEYS INSTRUCTIONS	4
2, POWER SUPPLY SELECTING	4
3, PROLONG LINE CONNECTION INSTRUCTION	4
4, REMOTE CONTROLLER INSTRUCTION.....	5
5, PARAMETERS SETTINGS GUIDE	6
6, TECHNICAL PARAMETERS	7

1, Monitor & keys instructions

- 1) V1/V2 Key (video switch for presenting single channel 1,2)
- 2) Reverse, mirror image key
- 3) MENU Key (menu)
- 4) - Key (normally lowering volume, while setting menu, it is for parameter changes)
- 5) + Key (normally increasing volume, while setting menu, it is for parameter changes)
- 6) POWER Key (Turn ON/OFF , usually images will show in 2s after turn-on)
- 7) Connecting cable
- 8) Infrared Receive



2, Power supply selecting

1) Auto storage battery: DC8-36V


Using auto adapter to supply power from the auto storage battery.

2) Turning back vehicle power supply: DC 12V

Note: Must connect the power supply into DC JACK 12V when you adopt auto power supply.

3, Prolong line connection instruction

- Yellow RCA connecting: 1, Video1 input
- White RCA connecting: 1, Video2 input(Car Rear-view Camera input)
- Red RCA connecting: Audio input

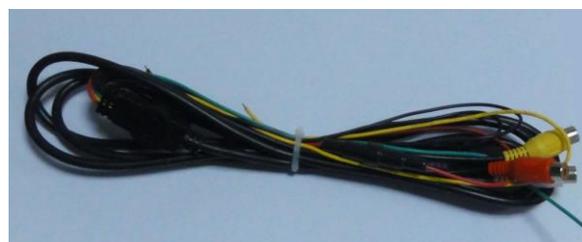

- Red line: DC8-32V power input
- Black line: DC8-32V power terra line
- Yellow Line: DC12V power output+
- Green Line: for backup(It can be used as TX wire if RS232 functions is available)

4, Remote controller instruction

- 1)  : can cut off the power of the monitor, press again will restart monitor.
- 2)  : press this button will turn up the volume
- 3)  : press this button will turn down the volume
- 4)  : Video channel select
- 5)  : can overturn the videos and pictures
- 6)  : Press Menu, the monitor will display the below menu:



INPUT	AUTO
BRIGHTNESS	50
CONTRAST	50
COLOR	50
VOLUME	18
LANGUAGE	ENGLISH

5, Parameters settings guide

1) Remote controller operation guide:

- Video Select: press "", the cursor will point at "INPUT", the line which cursor

points at will be red color. Press " or 

"can setup auto mode or manual mode. When it is auto, the monitor will turn to rear-view interface automatically once it receives reverse signal. When it is manual mode, the monitor will still display the original video not the rear-view interface although it receives the reverse signal.

- Brightness: press "" to move the cursor on "Brightness", it will turn to red color

with cursor on it. Press " or 

"to adjust brightness.

- Contrast: same method as Brightness.
- Color: same method as Brightness.
- Volume: same method as Brightness.

- Language: press "" to move the cursor on "Language", it will turn to red color

with cursor on it. Press " or 

"to select "Chinese" or "English".

2) Monitor key operation guide:

The operation is similar to that of remote controller. Its keys "MENU", "-", "+" have the

same functions with the ", , 

"of the remote controller.

6, Technical parameters

- Size: 7-inch(16:9)color LCD monitor
- Two Video(V1 and V2), One Audio inputs ; and One video, One Audio output; V2 is with reverse signal detector, Blue screen when there is no signal.
- Reverse Rear View:
When"Video Select" for"Auto",and when the vehicle is reversing (the V2 have video signal) , videos will be converted to rear view videos automatically. After vehicle reversing, videos will be returned to the original pictures.
- Contrast Ratio:300:1
- Brightness:250cd/m2
- Definition:800*480
- Language :Chinese/English
- Power Supply:DC8-32V,5W
- Video Standard: PAL/NTSC
- Others:Remote control,Loudspeaker,Image reversal
- The display effect, volume and mirror function for each camera can be separately set up
- New style, multiple functions, easy installation, and convenient operation
Mirror/normal image switch
- Can add RS232 function to use with our mobile dvr
- Dimension (Bracket is not included): 178mm(W)X 118mm(H)X 24mm(D)



Официальный дистрибьютор Teswell в России, Украине и странах СНГ – ООО «ЕвроМобайл»

ООО «ЕвроМобайл»

Санкт-Петербург, пр., Энгельса, д. 71, оф. 313

+7 (812) 331-75-76, 8 800 555-75-76

www.euromobile.ru

info@euroml.ru

ЕвроМобайл Украина

Запорожье, Инженерная пл., дом 1

Тел./факс: +380 (61) 213-41-77

www.euromobile.com.ua

info@euroml.com.ua